



LED PRO

Simple and flexible solution to design modern light lines in professional and retail spaces

LED RECESSED LINEAR LIGHT LUMINAIRE SERIES

PRODUCT INFORMATION

- Modern looking, neat luminaire offering comfortable, good quality lighting and can also work as a design element.
- Ideal lighting in the non-working areas of professional spaces such as offices, educational institutes, and also the welcoming areas and entrances of retail spaces.
- ILLUS LED RECESSED LINEAR Luminaire gives the customer the flexibility to choose between 12 models based on their specific need with lumen package from 600lm to 1800lm.

BENEFITS

- Clean and uniform light.
- Multiple application use.
- Easy to install and maintain.

FEATURES

- High CRI>95.
- Efficacy up to 108lm/w.
- Lifespan 30000H.
- Operating voltage AC220–240V.
- Non-Dimmable.



**BEYOND LIGHT..
TO THE LAST DETAILS!**

AREAS OF APPLICATION



Hospitality



Shopping Center



Commercial



Educational Center


TECHNICAL OPERATING & ELECTRICAL DATA

Body Color	White+Grey
Body Material	Aluminum+PC
CRI	95
Voltage and Frequency	AC220-240V, 50/60Hz
IP Rating	IP20
Dimming	Non-Dimmable
Beam Angle	28°
IEC Classification	Class II
Ambient Temperature	-20°C~45°C
Lifespan	30000H
Switching Cycle	100000x on/off
Warranty Period	36 Months


SPECIFICATIONS

Code No.	Model No.	Power	Lumen	Efficacy	CCT	Saving Energy	Current	Equivalent
LI614983	ILS6WGDL930WW01	6W	600lm	100lm/W	3000K	93%	50mA	83W
LI614984	ILS6WGDL940NW01	6W	620lm	103.33lm/W	4000K	93%	50mA	86W
LI614985	ILS6WGDL950DL01	6W	650lm	108.33lm/W	5000K	93%	50mA	90W
LI614987	ILS10WGDL930WW01	10W	820lm	82lm/W	3000K	91%	83mA	112W
LI614988	ILS10WGDL940NW01	10W	850lm	85lm/W	4000K	91%	83mA	116W
LI614989	ILS10WGDL950DL01	10W	890lm	89lm/W	5000K	92%	83mA	121W
LI614991	ILS12WGDL930WW01	12W	1150lm	95.83lm/W	3000K	92%	100mA	155W
LI614992	ILS12WGDL940NW01	12W	1200lm	100lm/W	4000K	93%	100mA	162W
LI614993	ILS12WGDL950DL01	12W	1270lm	105.83lm/W	5000K	93%	100mA	171W
LI614995	ILS20WGDL930WW01	20W	1650lm	82.50lm/W	3000K	91%	150mA	220W
LI614996	ILS20WGDL940NW01	20W	1720lm	86lm/W	4000K	91%	150mA	229W
LI614997	ILS20WGDL950DL01	20W	1800lm	90lm/W	5000K	92 %	150mA	240W

DIMENSIONS

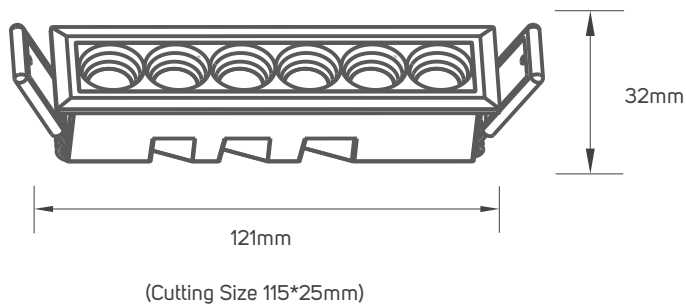

LI614983 - LI614984 - LI614985 - LI614987 - LI614988 - LI614989



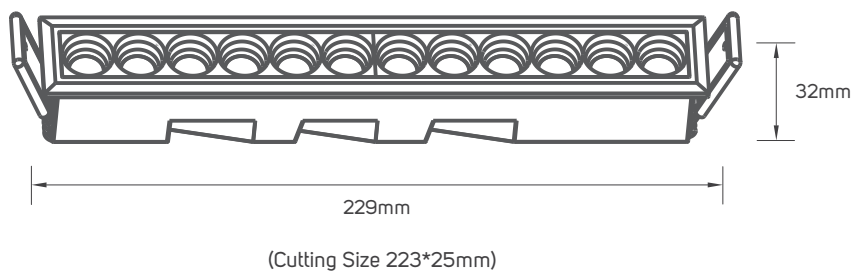


LI614991 - LI614992 - LI614993 - LI614995 - LI614996 - LI614997

ACCESSORIES

Code No.	Model No.	Body Color	Material
LI615038	ILSWSMKGDLO1	White	Aluminium+PC
LI615039	ILSWSMKGDLO2	White	Aluminium+PC

DIMENSIONS

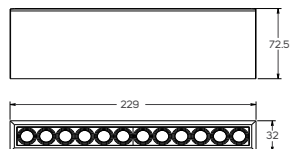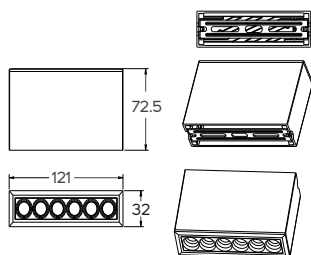

LI615038 (LI614983-LI614989)

LI615039 (LI614991-LI614997)



**LED
RECESSED LINEAR
LIGHT LUMINAIRE
SERIES**

**BEYOND LIGHT..
TO THE LAST DETAILS!**

