

For every project where light really matters, easy to install and maintain

LED FLAT LUMINAIRE SERIES (TUNABLE CCT)

PRODUCT INFORMATION

- Innovative, easy to use and high-quality luminaires.
- Provide better wide beam light distribution for straightforward and effective lighting.
- ILLUS LED FLAT Luminaire gives the customer the flexibility to choose between 4 models based on their specific need with lumen package from 4200lm to 6400lm.

BENEFITS

- Save on energy and maintenance costs.
- Support fast and flexible installation.
- Ideal for general application projects with a robust design and high water and dust proof rating.

FEATURES

- High CRI95.
- Long lifespan 50000H.
- Operating voltage AC220-240V.
- Tunable CCT.



**BEYOND LIGHT..
TO THE LAST DETAILS!**

AREAS OF APPLICATION



Hospitality



Public indoor



Shopping Center



Commercial



Workplace



Educational Center



TECHNICAL OPERATING & ELECTRICAL DATA

Body Color	White
Body Material	Steel+Polystyrene
Voltage & Frequency	AC220-240V, 50/60Hz
IP Rating	IP44 (Front)- IP20 (Back)
Ambient Temperature	-20°C~40°C
Beam Angle	120°
Dimming	Non-Dimmable
IEC Classification	Class II
Lifespan	50000H
Switching Cycle	100000x on/off
Warranty Period	60 Months

SPECIFICATIONS



Code No.	Model No.	Power	Lumen	Efficacy	CCT	CRI	Current
LI615529	ILS36FLTL9CCTW01	36W	4200lm	116.67lm/W	3000K 4000K 5700K	90	160mA
LI615530	ILS50FLTL9CCTW01	50W	6200lm	124lm/W	3000K 4000K 5700K	90	220mA
LI615531	ILS36FLTL9CCTW02	36W	4300lm	119.44lm/W	3000K 4000K 5700K	90	160mA
LI615532	ILS50FLTL9CCTW02	50W	6400lm	128lm/W	3000K 4000K 5700K	90	220mA

DIMENSIONS

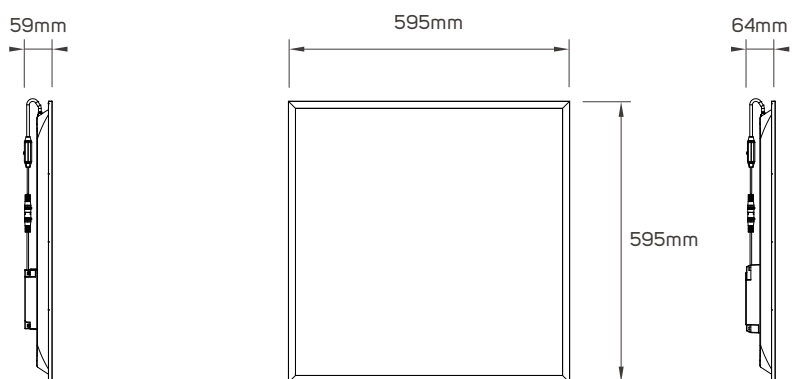
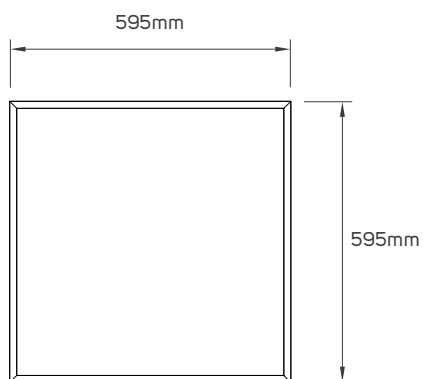


LI615529

LI615530

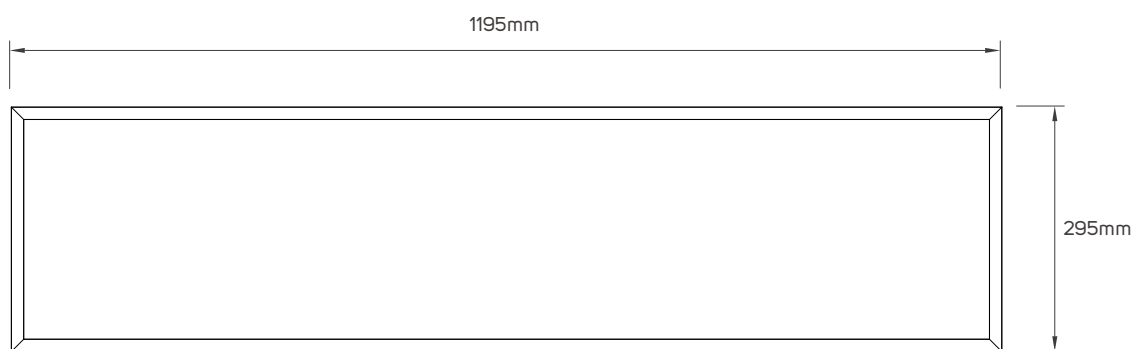


LI615531

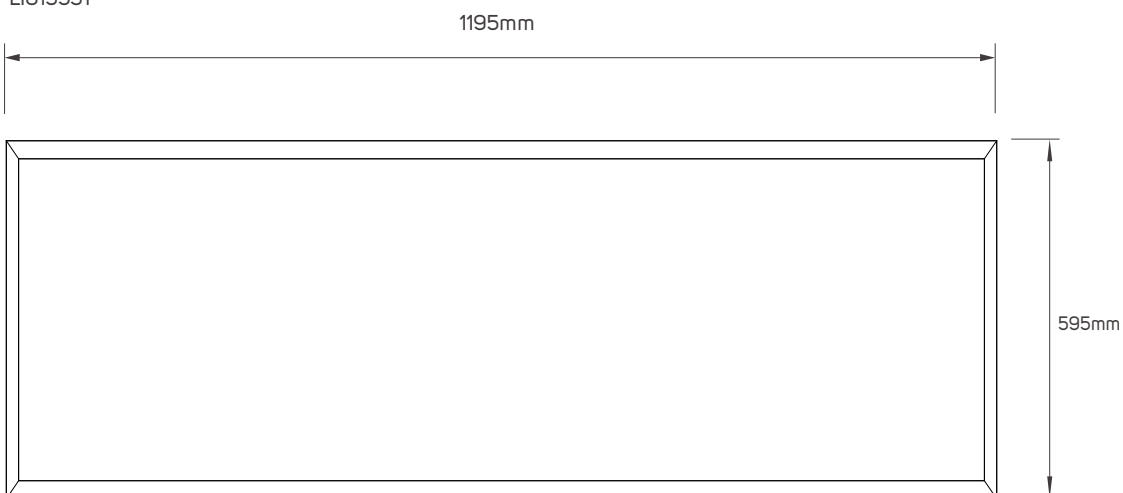

LI615532

APPLICATION PICTURE

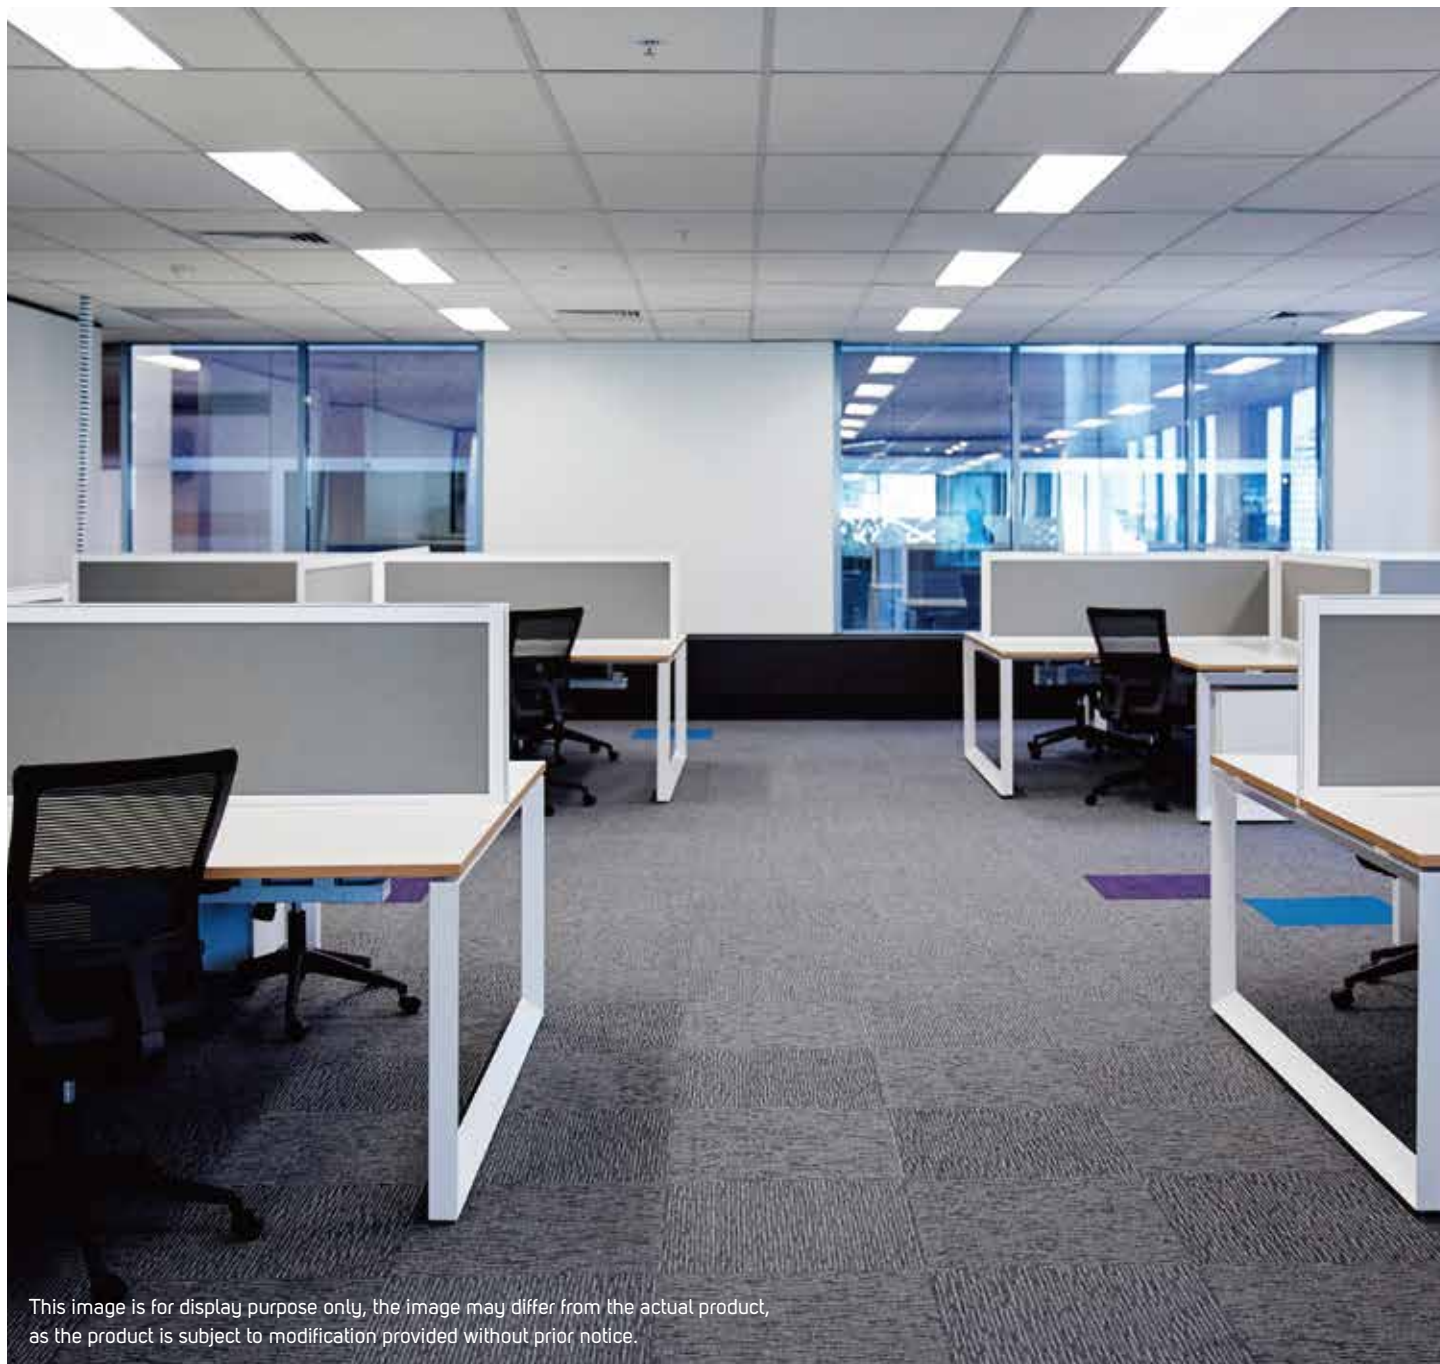

This image is for display purpose only, the image may differ from the actual product, as the product is subject to modification provided without prior notice.

LED FLAT LUMINAIRE SERIES (Tunable CCT)

**BEYOND LIGHT..
TO THE LAST DETAILS!**

