



LED PRO

Simple and flexible solution to design modern light lines in professional and retail spaces

LED RECESSED LINEAR LIGHT LUMINAIRE (TRIMLESS) SERIES

PRODUCT INFORMATION

- Modern looking, neat luminaire offering comfortable, good quality lighting and can also work as a design element.
- Ideal lighting in the non-working areas of professional spaces such as offices, educational institutes, and also the welcoming areas and entrances of retail spaces.
- ILLUS LED RECESSED LINEAR LIGHT Luminaire (trimless) gives the customer the flexibility to choose between 12 models based on their specific need with lumen package from 600lm to 1800lm.

BENEFITS

- Clean and uniform light.
- Multiple application use.
- Easy to install and maintain.

FEATURES

- High CRI>95.
- Efficacy up to 108lm/w.
- Lifespan 30,000H.
- Operating voltage AC220–240V.
- Non-Dimmable.



**BEYOND LIGHT..
TO THE LAST DETAILS!**

AREAS OF APPLICATION



Hospitality



Shopping Center



Commercial



Educational Center



TECHNICAL OPERATING & ELECTRICAL DATA

Body Color	White
Body Material	Aluminum+PC
CRI	95
Voltage and Frequency	AC220-240V, 50/60Hz
IP Rating	IP20
Dimming	Non-Dimmable
Beam Angle	28°
IEC Classification	Class II
Ambient Temperature	-20°C~45°C
Lifespan	30000H
Switching Cycle	100000x on/off
Warranty Period	36 Months


SPECIFICATIONS

Code No.	Model No.	Power	Lumen	Efficacy	CCT	Saving Energy	Current	Equivalent
LI614999	ILS6WGDL930WW01	6W	600lm	100lm/W	3000K	50mA	50mA	83W
LI615000	ILS6WGDL940NW01	6W	620lm	103.33lm/W	4000K	50mA	50mA	86W
LI615001	ILS6WGDL950DL01	6W	650lm	108.33lm/W	5000K	50mA	50mA	90W
LI615003	ILS10WGDL930WW01	10W	820lm	82lm/W	3000K	83mA	83mA	112W
LI615004	ILS10WGDL940NW01	10W	850lm	85lm/W	4000K	83mA	83mA	116W
LI615005	ILS10WGDL950DL01	10W	890lm	89lm/W	5000K	83mA	83mA	121W
LI615007	ILS12WGDL930WW01	12W	1150lm	95.83lm/W	3000K	100mA	100mA	155W
LI615008	ILS12WGDL940NW01	12W	1200lm	100lm/W	4000K	100mA	100mA	162W
LI615009	ILS12WGDL950DL01	12W	1270lm	105.83lm/W	5000K	100mA	100mA	171W
LI615011	ILS20WGDL930WW01	20W	1650lm	82.50lm/W	3000K	150mA	150mA	220W
LI615012	ILS20WGDL940NW01	20W	1720lm	86lm/W	4000K	150mA	150mA	229W
LI615013	ILS20WGDL950DL01	20W	1800lm	90lm/W	5000K	150mA	150mA	240W

| DIMENSIONS

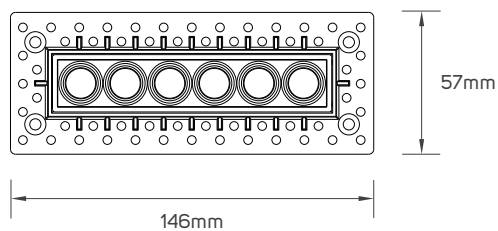

LI614999 - LI615000 - LI615001 - LI615003 - LI615004 - LI615005 (Cutting Size-120*32MM)

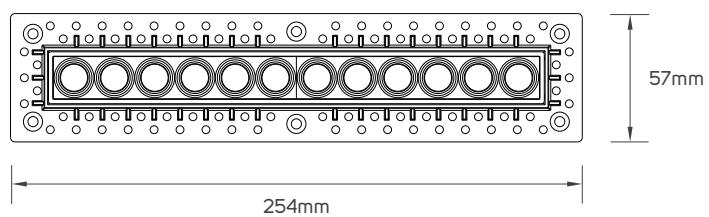

LI615007 - LI615008 - LI615009 - LI615011 - LI615012 - LI615013 (Cutting Size-228*32MM)

APPLICATION PICTURE



This image is for display purpose only, the image may differ from the actual product, as the product is subject to modification provided without prior notice.

LED RECESSED LINEAR LIGHT LUMINAIRE (TRIMLESS) SERIES

**BEYOND LIGHT..
TO THE LAST DETAILS!**



C/ Cuenca, 87, Alaquas 46970, (Valencia) Spain, Ph. 34 961 623 958

www.illuslighting.com

illus illumination reserve the right to make dimensional, design and technical alternations without prior notice. illus illumination endeavor to ensure that any advice, recommendation or information it provides in product literature is accurate and correct. However due to the fact that illus do not have direct control on where and how the products are installed, illus illumination cannot accept any liability either direct or indirect arising from the use of illus products whether or not in accordance with any advice, specification, recommendation or information provided by illus illumination or its distributors.

11/19/2021 V.1