

Full range recessed up lights to make your space distinctive.

LED INGROUND LUMINAIRE SERIES

PRODUCT INFORMATION

- Provide a complete range of up lights family, wattage and color temperature.
- Make your space distinctive with more safety and convenience as well.
- ILLUS LED INGROUND Luminaire gives the customer the flexibility to choose between 8 models based on their specific need with lumen package from 55lm to 500lm.

BENEFITS

- Easy to opt.
- Quick installation.
- Robust design for severe conditions.
- Equipped with surge protection function.

FEATURES

- High CRI>95.
- Efficacy up to 55lm/w.
- Long lifespan 50000H.
- Operating voltage AC220-240V.
- Non-Dimmable.
- Good Impact Rating.



AREAS OF APPLICATION



Commercial



Shopping Center



Educational center



Garden



I TECHNICAL OPERATING & ELECTRICAL DATA


Voltage & Frequency	AC220-240V, 50/60Hz
Rated CRI	95
Color Temperature	3000K
IEC Classification	Class I
IP Rating	IP67
Ambient Temperature	-20°C~45°C
Body Material	Stainless Steel+Aluminum
Surge Protection	1kV
IK Rating	IK08
Lifespan	50000H
Switching Cycle	100000x on/off
Warranty Period	60 Months

SPECIFICATIONS

Code No.	Model No.	Body Color	Power	Lumen	Efficacy	Beam Angle	Current
LI615356	ILS1RMOIGL01	Silver +Black	1W	55lm	55lm/W	30°	10mA
LI615357	ILS2RMOIGL01	Silver +Black	2.5W	95lm	38lm/W	30°	30mA
LI615358	ILS3RMOIGL01	Silver +Black	3.5W	130lm	37.14lm/W	30°	40mA
LI615359	ILS6RMOIGL02	Silver +Black	6W	230lm	38.33lm/W	10°	60mA
LI615360	ILS6RMOIGL03	Silver +Black	8W	250lm	31.25lm/W	15°	80mA
LI615361	ILS6RMOIGL04	Silver +Black	6W	240lm	40lm/W	30°	60mA
LI615362	ILS10RMOIGL01	Silver +Black	10W	500lm	50lm/W	5°	90mA
LI615363	ILS10RMOIGL02	Silver +Black	10W	400lm	40lm/W	10°	90mA




DIMENSIONS

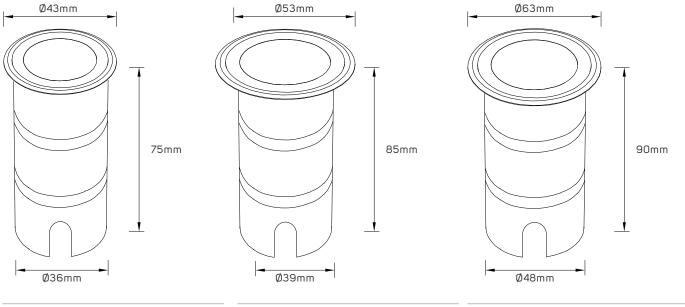

LI615356 (Cutting size Ø36)

LI615357 (Cutting size Ø39)

LI615358 (Cutting size Ø48)



LI615359-LI615360-LI615361-LI615362-LI615363 (Cutting size Ø65)



APPLICATION PICTURE



LED INGROUND LUMINAIRE SERIES

BEYOND LIGHT..
TO THE LAST DETAILS!

